


Slip Resistant Trays

The Level25-SR is made up of three layers

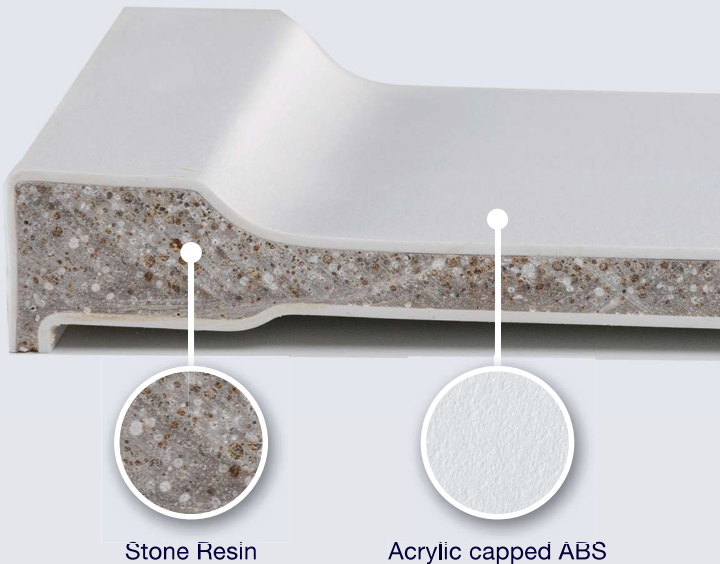


Stone Resin

Acrylic capped ABS

THE SLIP RESISTANT PENDULUM TEST

preferred assessment method of the Health and Safety Executive



Test method subject of British Standard British BS 7976: Parts 1-3, 2002.2

BAREFOOT WET CONDITION TEST

The tester swings an imitation heel (using a standardised rubber soling sample), over a set area in a controlled manner.



MERLYN reached an SRV (Slip Resistance Values) in wet conditions greater than the required 36 mark. This ranks MERLYN in a premium class.

THE RAMP TEST

DIN 51097		Ramp test for barefoot	Ramp angle
	Class A	Most Slippery	≥ 12°
	Class B		≥ 18°
	Class C	Least Slippery	≥ 24°
MERLYN least slippery Class C > 24°			

MERLYN slip resistant tray has achieved Class C for DIN 51097 – a barefoot ramp test.

FEATURES & BENEFITS

- 25 Year Guarantee
- Antislip is manufactured into the coating and won't wear
- Sleek minimalist design
- Ultra slim 25mm low level tray
- Discreet integrated waste cover
- Fitted on or level with floor
- Comes with 90mm fast flow waste

Rectangular Tray (comes with MERLYN 90mm fast flow waste)

Size	Code
1000x800	L108RTAS
1000x900	L109RTAS
1100x800	L118RTAS
1100x900	L119RTAS
1200x800	L128RTAS
1200x900	L129RTAS
1300x800	L138RTAS
1300x900	L139RTAS
1400x760	L1476RTAS
1400x800	L148RTAS
1400x900	L149RTAS
1500x800	L158RTAS
1500x900	L159RTAS
1600x800	L168RTAS
1600x900	L169RTAS
1700x800	L178RTAS
1700x900	L179RTAS

Offset Quadrant Tray (comes with MERLYN 90mm fast flow waste)

Size	Code
1200x900	L129QLAS
1200x900	L129QRAS

This product is handed – please choose L for Left and R for Right when ordering.

Quadrant Tray (comes with MERLYN 90mm fast flow waste)

Size	Code
900x900	L90QAS

Square Tray (comes with MERLYN 90mm fast flow waste)

Size	Code
900x900	L90SQAS